

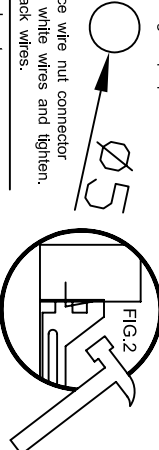


应测量尺寸
△
△
△

Installation Instructions and Template for 3" Housing

- Step 1.** Using template, scribe circle on ceiling in desired location.
- Step 2.** Accurately cut hole in ceiling.
- Step 3.** Position fixture and extend bar hangers to fit between joists (FIG. 1).
- Step 4.** Secure the bar hangers by hammering the special tabs (FIG. 2).
- Step 5.** To avoid fixture from any movements, fixture could be locked into place by tightening the screw placed on the frame then the screw fasten on the hanger bar (FIG. 3).
- Step 6.** Provide electrical service according to your local and state electrical code. Lift spring tab to open junction box cover and remove the appropriate knock-out(s) to accommodate usage of proper electrical service (See back for wiring diagram).
- Step 7.** Connect supply wires to socket leads.
Twist black supply wire to black socket wire. Twist white supply wire to white socket lead. To insulate connections, place wire nut connector (not included) over the twisted group of white wires and tighten. Repeat the same procedure with the black wires.
- Step 8.** Connect ground copper wire from wiring box to green ground wire from electrical service. Splice ground wires together. Follow procedure in Step 7 above for splicing wires together.
- Step 9.** Place all the wiring and connections inside the box and replace the junction box cover.
- Step 10.** Install trim.




A面



Ø98

Installation Instructions and Template for 3" Housing

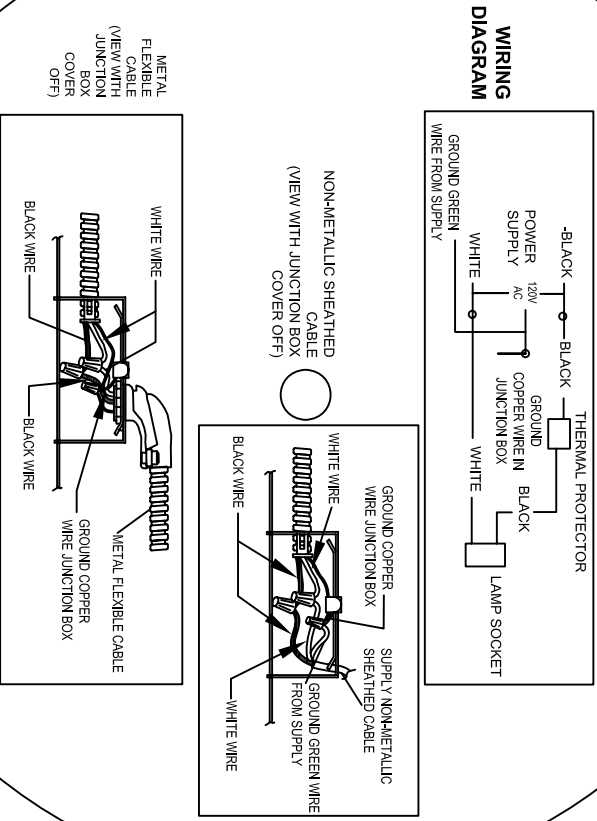

B面



技术要求：
双面打印，白底黑字，铜版纸厚度为0.2mm

品名	3"使用卡	品号	Y90577Z	版次	A	临时品号		单位	mm	修改		客户编号	73#: 517193
						用料规格		材质	250#铜版纸	制图			
						文件名称		厚度		审查			
						视		比例	1:1	核准			
						角							

九州电器有限公司