

ASSEMBLY INSTRUCTION


SKU#517656/511782

NOTE: Please consult a qualified electrician if you are not certain of the installation or service.

CAUTION: Before starting the installation or service, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

1. Carefully unpack the fixture, lay out all parts on a clean surface.
2. Insert the plastic nuts into the wall, and fasten the mounting strap onto the wall by screwing self-threading screws into the plastic nuts.
3. Tie ground wire from outlet box and from fixture to the ground screw on the cross bar. Connect white wire from fixture to white wire (neutral wire) from supply circuit. Connect black wire from fixture to black wire (live wire) from supply circuit. Cover connections using provided wire connectors.
4. Place the fixture body to the wall by aligning the protruding mounting screws all the way through the wall plate and tighten lock nuts to mounting screws until the fixture body was held firmly against the wall.
5. Unscrew the socket rings from the sockets. Place shades over sockets, and reattach socket ring to socket to secure shade.
6. Install the bulbs (sold separately).
7. Reconnect on the power.

This light can be installed in an upright or a downlight position.

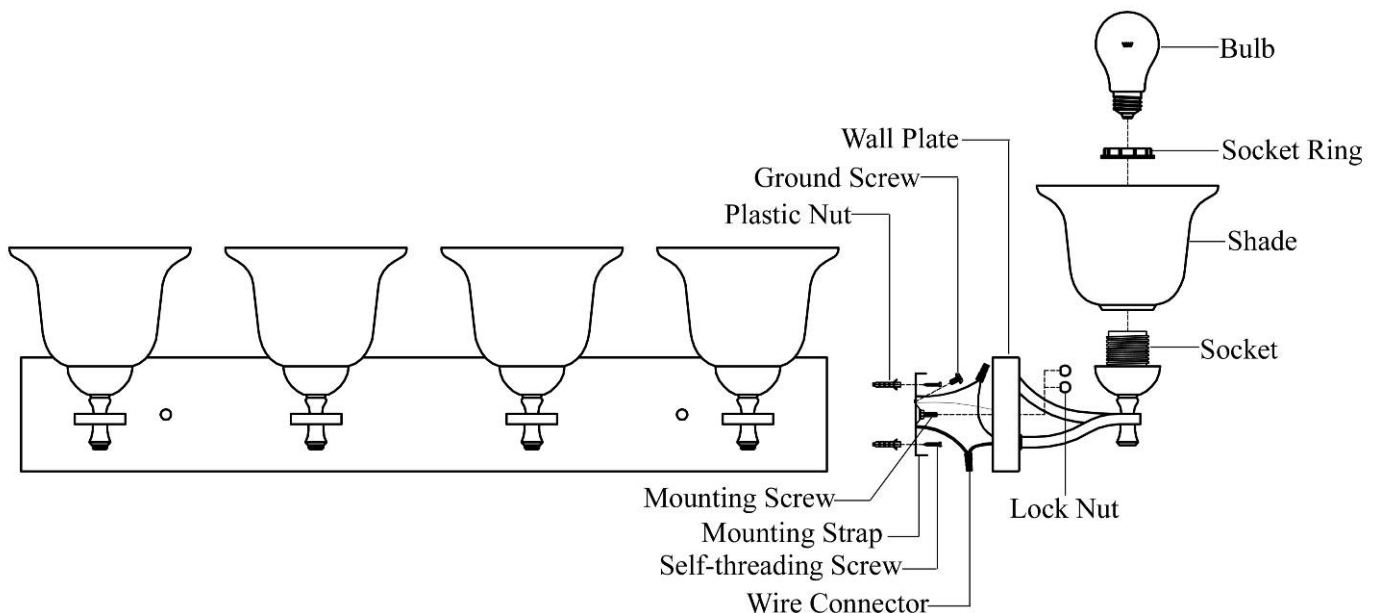

dh[®]
DESIGNHOUSE