

ASSEMBLY INSTRUCTION


SKU#517946

NOTE: Please consult a qualified electrician if you are not certain of the installation.

CAUTION: Before starting the installation or service, disconnect the power by turning off the circuit breaker or removing the fuse at the fuse box.

1. Carefully unpack the fixture, lay out all parts on a clean surface.
2. Attach the mounting ring to the outlet box using provided outlet box screws.
3. Tie ground wire from outlet box and from fixture to the ground screw on the mounting ring. Connect white wire from fixture to white wire (neutral wire) from supply circuit. Connect black wire from fixture to black wire (live wire) from supply circuit. Cover connections using provided wire connectors.
4. Place the fixture body against wall by aligning the protruding mounting screws all the way through the wall plate and tighten lock nuts to the mounting screws until the fixture body is held firmly against the wall.
5. Unscrew the socket rings from the sockets. Place shades over sockets, and reattach socket rings to sockets to secure shades.
6. Install the bulbs (sold separately).
7. Reconnect the power.

This light can be installed in an uplight or a downlight position.

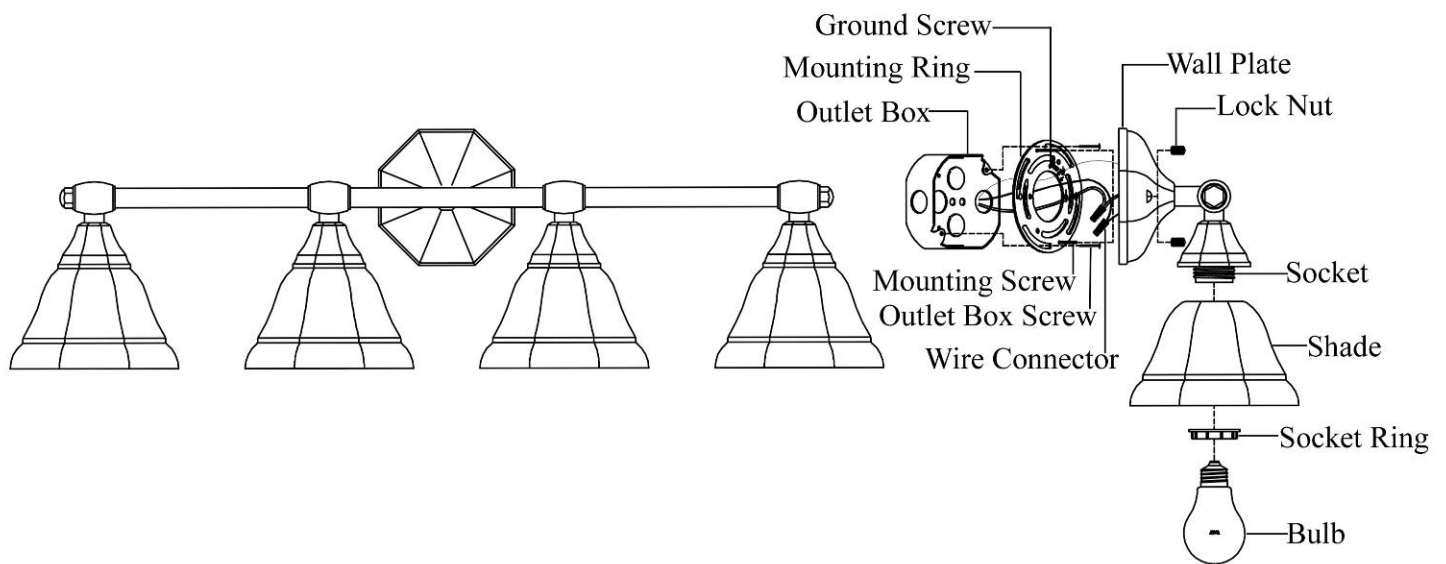

dh[®]
DESIGNHOUSE